

To place your order
Call 303.745.2402

CeilingMAX

Surface Mount Grid System


No wires to hang or time-consuming leveling

Available in a wide range of colors and finishes

Snap-In technology makes installation simple and easy

Snap-Out technology provides ability to access
the plenum and replace tiles at any time

Uses any standard 2' x 2' or 2' x 4' acoustical ceiling tile
designed for 1/4" grid

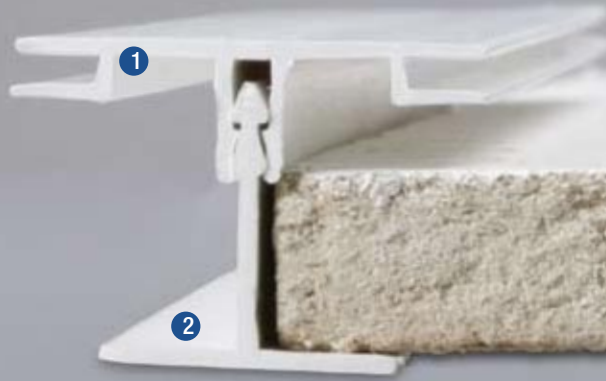

EASILY RENOVATE OLD CEILINGS WITH DURABLE, HIGH-GRADE VINYL



Contractors recommend CeilingMAX for direct applications over plaster, drywall and paste-up ceilings. Manufactured with high-grade vinyl, CeilingMAX eliminates rust and scratches without demolition cost, mess and downtime. CeilingMAX provides an immediate acoustic solution, and with surface-mounting, saves up to 6" of ceiling height.

Surface Burning Characteristics

ASTM E 84 Class A
V.O. rating under U.L. 94

Load

Intermediate duty

Safety

Approved for food manufacturing/processing
(consult manufacturer for specifications)

Durability

Rust and corrosion resistant

Material

White and solid colors: virgin grade vinyl
Patina colors: virgin grade vinyl with hot foil laminate

Compatibility

Works with any standard 2' x 2' or 2' x 4' tile
designed for $\frac{15}{16}$ " grid





(b)

(c)

(a) CeilingMAX over floor joists /
(b) CeilingMAX over 12" x 12" tile ceiling / (c) CeilingMAX over drywall



*UNCOMPROMISED PERFORMANCE,
UNMATCHED EASE*

(a)

With its surface mount application CeilingMAX quickly and easily covers old 12" x 12" tile ceilings, floor joists, plaster or drywall. Using "snap-in" technology, CeilingMAX works with any standard 2' x 2' or 2' x 4' tile designed for $\frac{15}{16}$ " grid.





CeilingMAX

Product Specifications

Item description:	Item #	Dimensions
1 Top Hanger	109	96" x 1 1/2" x 1 5/32"
2 Runner	119	96" x 1 5/16" x 1 5/16"
3 Wall Bracket	159	96" x 1 5/16" x 1 3/16"
4 Cross Tee	129	23" x 1 5/16" x 1 5/16"
25" Tee	121	25" x 1 5/16" x 1"



cross tee joint



tile interface options