

To place your order
Call 303.745.2402

HG-Grid

Vinyl Suspension System

Eliminates rust and white corrosion

Low-cost alternative to existing high-humidity systems

Handles interior or exterior high humidity or corrosive environments

Quick-lock keyhole system offers easy installation

**High-grade vinyl eliminates damage and scratches
during installation and transportation**

**Uses any standard 2' x 2' or 2' x 4' acoustical ceiling tile
designed for 1/8" grid**





DURABLE PERFORMANCE FOR DIVERSE ROOM ENVIRONMENTS



HG-Grid gives contractors a high-performing vinyl grid ceiling to withstand humid conditions, plus the added benefits of installing like most conventional metal systems without the extreme cost.

Surface Burning Characteristics

ASTM E 84 Class A
V.O. rating under U.L. 94

Load

310 series - Light duty / 312 series - Intermediate duty
(Load rating per ASTM E C 635 using 2' hanger spacing)

Safety

Approved for food manufacturing/processing
(consult manufacturer for specifications)

Durability

Rust and corrosion resistant

Material

White and solid colors: virgin grade vinyl
Patina colors: virgin grade vinyl with hot foil laminate


Compatibility

Works with any standard 2' x 2' or 2' x 4' tile
designed for $\frac{15}{16}$ " grid

Warranty

5-year limited warranty



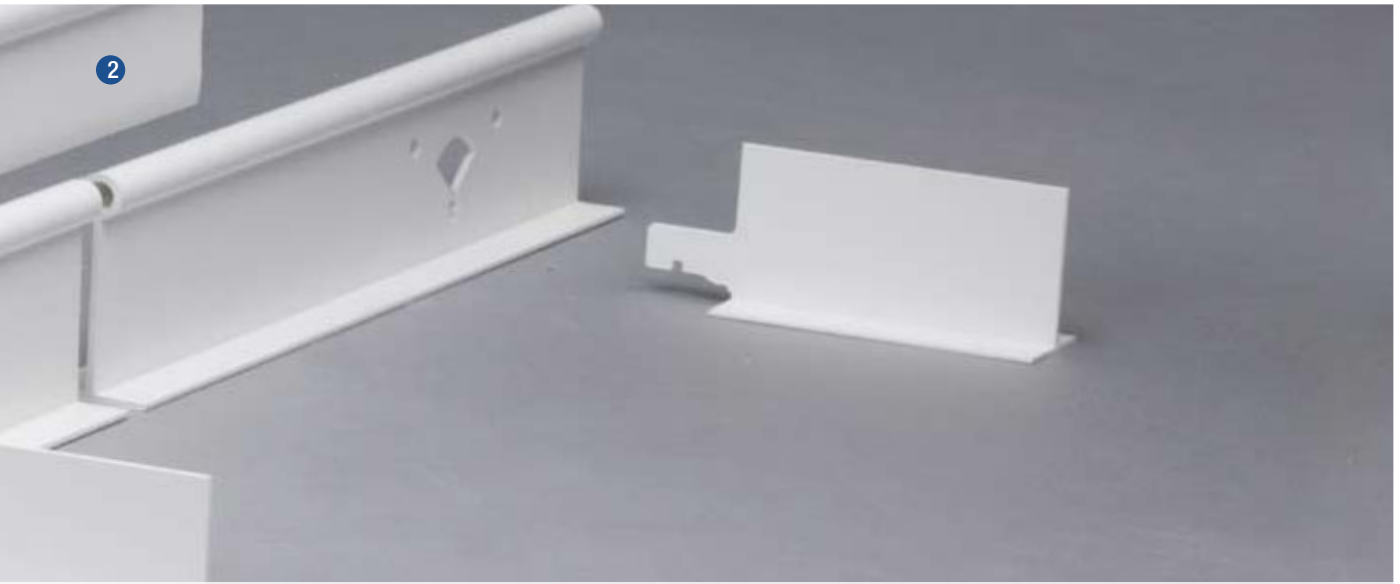

HG-Grid

Product Specifications

| Item description: | Item # | Dimensions |
|-------------------------------------------------|--------|---------------------------------------------------------------------------|
| 8' Main, Light Duty Main Connector | 310 | 96" x 1 ⁵ / ₁₆ " x 1 ¹ / ₂ " |
| 1 8' Main Intermediate Duty 2 Main Connector | 312 | 96" x 1 ⁵ / ₁₆ " x 2" |
| 3 2' Tee | 320 | 23" x 1 ⁵ / ₁₆ " x 1 ¹ / ₂ " |
| 8' Angle Molding | 350 | 96" x 1 ⁵ / ₁₆ " x 1 ⁵ / ₁₆ " |



keyhole operation



tile interface options