

Product Name

GridMAX

Manufacturer's Name

Acoustic Ceiling Products (ACP)

Ceiling Grid Covers™

GridMAX®

September 28, 2007

Page 1

PRODUCT DESCRIPTION

PRODUCT FEATURES

- **BASIC USES / RELATED USES**
 - PVC grid covers, easily snaps over existing metal grid system.
 - PVC grid covers snap over blemished or rusted existing metal tee and cross bars.
 - Acoustic tile/panels not included.
 - No demolition or downtime required.

- **PRODUCT ATTRIBUTES AND CHARACTERISTICS**
 - Snap-on technology is easy to use and install.
 - Compatible with imperial or metric grid system.
 - Attaches directly over existing metal suspension system.
 - No demolition required prior to installation.
 - Main covers are pre-notched to provide seamless transitions at cross tee intersections.

- **ENVIRONMENTAL**
 - PVC site cuttings and unused pieces can be collected and recycled.
 - Product may be recycled upon final disposal.

- **SELECTION CRITERIA**
 - Developed for applications requiring a new look or over existing rusting or scratched metal grid system.
 - Designed for applications where the minimal amount of disruption is required.
 - GridMAX is an alternative to painting an existing substrate and is cost effective as a replacement.
 - Suitable spaces for application include schools and universities, hospitals and health care facilities, food manufacturing and processing plants, restaurants, hotels and hospitality properties, office space, commercial retail space, and airports.

- **APPLICABLE STANDARDS, RELATED REFERENCES**
 - ASTM D638 - Standard Test Method for Tensile Properties of Plastics.
 - ASTM D696 - Standard Test Method for Coefficient of Linear Thermal Expansion of Plastics Between -30°C and 30°C With a Vitreous Silica Dilatometer.
 - ASTM D790 - Standard Test Methods for Flexural Properties of Un-reinforced and Reinforced Plastics and Electrical Insulating Materials.
 - ASTM D792 - Standard Test Methods for Density and Specific Gravity (Relative Density) of Plastics by Displacement.
 - ASTM E84 - Standard Test Method for Surface Burning Characteristics of Building Materials.
 - CISCA (Ceilings & Interior Systems Contractors Association) - Ceiling System Handbook and Acoustic Ceilings Use and Practice.
 - ISO 4611 - Plastics - Determination of the Effects of Exposure to Damp Heat, Water Spray and Salt Mist.
 - UL - Fire Resistance Directory.
 - USFDA (United States Food and Drug Administration)

Product Name

GridMAX

Manufacturer's Name

Acoustic Ceiling Products (ACP)

Ceiling Grid Covers™GridMAX®

September 28, 2007

Page 2

PRODUCT DESCRIPTION

- **QUALITY STATEMENT, TESTS, AND CERTIFICATIONS**
 - Fire Resistance to UL Design #94.
 - Fire Performance: Class A.
 - Standard finish: Flame spread 10, smoke developed 140, to ASTM E84.
 - Foil-faced finishes: Flame spread 15, smoke developed 250, to ASTM E84.
 - USFDA approval of the resin used in the CeilingMAX system for food processing applications.
 - Durometer Hardness: 82 to ASTM D2240.
 - Tensile Strength: 44.1 MPa (6400 psi); Tensile Modulus of 2,620 MPa (380,000 psi) to ASTM D638.
 - Flexural Strength: 77.9 MPa (11,300 psi); Flexural Modulus of 2,827 MPa (410,000 psi) to ASTM D790.
 - Heat Deflection Temperature: 73 degree Celcius (163 degree Fahrenheit) to ASTM D648.
 - Coefficient of Linear Expansion: 3.3×10^{-5} in/in/degree Fahrenheit to ASTM D696.
- **PACKAGING, HANDLING, PROTECTION, AND DELIVERY INSTRUCTIONS**
 - Deliver materials within original GridMAX cartons and take care to handle and protect against unnecessary damage such as moisture, breakage, dirt, surface soiling, etc.
 - Allow all ceiling components to acclimate to room temperatures before installation.
- **SPECIAL WARRANTY**
 - Limited Warranty: Ten (10) years from product manufacturing defects.
- **LIMITATIONS**
 - Non-fire rated.
 - GridMAX is not intended for extremely high or low temperature service environments – consider coefficient of linear expansion when applying to an existing metal grid assembly.
 - Ensure compatibility with certain shadow line acoustic panels.
 - Presence of certain chemical solvents should be avoided, contact ACP for more information.
- **AVAILABILITY**
 - Nationally and internationally.
- **COST**
 - Refer to Acoustic Ceiling Products, LLC. and authorized representatives for pricing.

PRODUCT PROPERTIES

- **MATERIAL, COMPOSITION, AND DESIGN**
 - Grid material: Virgin grade polyvinyl chloride (PVC).
 - Laminated material: Acrylonitrile butadiene styrene terpolymer (ABS) plastic laminated

Product Name

GridMAX

Manufacturer's Name

Acoustic Ceiling Products (ACP)

Ceiling Grid Covers™

GridMAX®

September 28, 2007

Page 3

PRODUCT DESCRIPTION

with hot stamping foil.

- **SHAPE, MASS, AND DIMENSIONS**

- **Grid Components:**

- **Manufacturer's Grid Cover Style: "GridMAX":**
 - *** Patents Pending – Patent # 6,305,137 and 6,324,806**

Grid Face	Item #	Description	Dimensions
24 mm (15/16 inch)	210	Main Cover	48 x 1 x 1/8 inches
25 mm (1 inch)	212		48 x 1-1/8 x 1/8 inches
14 mm (9/16 inch)	213		48 x 1/2 x 1/8 inches
24 mm (metric only)	215		1200 x 25 x 3 mm
24 mm (15/16 inch)	220	Tee Cover	23 x 1 x 1/8 inches
25 mm (1 inch)	222		23 x 1-1/8 x 1/8 inches
14 mm (9/16 inch)	223		23 x 1/2 x 1/8 inches
24 mm (metric only)	225		574 x 25 x 3 mm
24 mm (15/16 inch)	230	Tee Cover	47 x 1 x 1/8 inches
25 mm (1 inch)	232		47 x 1-1/8 x 1/8 inches
14 mm (9/16 inch)	233		47 x 1/2 x 1/8 inches
24 mm (metric only)	235		1174 x 25 x 3 mm
24 mm (15/16 inch)	250	Wall Molding Cover	48 x 1 x 1/8 inches
25 mm (1 inch)	252		48 x 1-1/8 x 1/8 inches
14 mm (9/16 inch)	253		48 x 1/2 x 1/8 inches
24 mm (metric only)	255		1200 x 25 x 3 mm

- **Grid Nominal Size: 610 x 610 mm (24 x 24 inches) or 610 x 1220 mm (24 x 48 inches).**

- **SHOP FABRICATION AND ASSEMBLY**

- **All assembly can be completed on site.**

- **FINISH, COLORS AND TEXTURES**

- **Standard Colors:**

- **Unpainted: White, paintable (00).**
 - **Metallic: Brass (04), Chrome (05), Satin Black (07), Brushed Aluminum (08), Argent Silver (09), Copper (10), Copper Fantasy (11), Verdigris (16), Bermuda Bronze (17), Moonstone Copper (18) Cracked Copper (19), Muted Gold (20), Cross Hatch Silver (21), Argent Gold (24), Polished Copper (25), Oil Rubbed Bronze (26), Smoked Pewter (27),**
 - **Wooden: Light Maple (12), Pearwood (13), Welsh Cherry (14), Medium Oak (06),**

- **Custom colors: Contact manufacturer for colors.**

Product Name

GridMAX

Manufacturer's Name

Acoustic Ceiling Products (ACP)




September 28, 2007

Page 4

PRODUCT DESCRIPTION

PRODUCT PLACEMENT

- **PREPARATION WORK**
 - Perform installation as late as possible in the building process after dust generating activities have been completed.
 - Examine existing grid assembly for soundness of connections and ensure that grid is level, to accept grid covers.
- **INSTALLATION, ERECTION, APPLICATION, CONSTRUCTION**
 - Slide long flange over the tip of the metal tee and snap into place.
 - Consult manufacturer for detailed instruction guide.

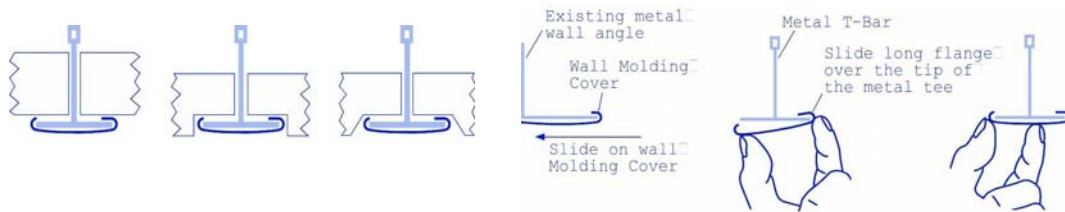

Grid Interface Options

Application

- **MAINTENANCE INSTRUCTIONS AND PROCEDURES**
 - Clean with a mild soap and water.
 - On a daily basis, moderate dust or vacuum clean with a soft, clean brush attachment.
 - On a weekly basis, manual wet clean.

Corporate Identification

Acoustic Ceiling Products, LLC.
 P.O. Box 1581
 Appleton, WI, U.S.A. 54912-1581
 Phone - Toll Free: 1-800-434-3750
 Fax - Toll Free: 1-800-434-3751

E-mail to: support@acpideas.com
 Web site: www.acpideas.com

Technical Services Available

Products available nationally and from regional representatives.

Classification and Filing

MasterFormat 1995
 Section 09532 – Ceiling Grid Covers
 MasterFormat 2004

Product Name

GridMAX

Manufacturer's Name

Acoustic Ceiling Products (ACP)



September 28, 2007

Page 5

PRODUCT DESCRIPTION

Section 09 53 35 – Ceiling Grid Covers

UniFormat

Section C3030 – Ceiling Finishes